

9909 Average Temperature Sensor

Calculate accurate liquid volumes to API standards by integrating an average temperature sensor into an inventory system




Features

- Multiple element resistance temperature sensor
- Superior temperature accuracy in stratified service
- Provides overall average tank product temperature
- Suitable for most low and medium pressure tanks
- Fixed, floating and covered floating roof kits
- Operating temperature ranges to +392 °F (+200 °C)
- Flexible 316 S.S. or monel sheath over copper elements
- Accurate to +/- 0.25 °F (+/- 0.14 °C)

Applications


The 9909 Average Temperature Sensor (ATS) is a multiple element resistance temperature device designed to provide the average product temperature in large bulk liquid storage tanks.

The 9909 ATS provides an accurate means of measuring the temperature of the product in accordance with API 2543 standard. A combined level and temperature instrumentation solution improves management of your inventory, such as crude oils, fuel oils, diesel fuels, gasolines and liquid gases. Overall efficiency can be increased, whether the facility is a refinery, chemical plant tank farm or distribution terminal.

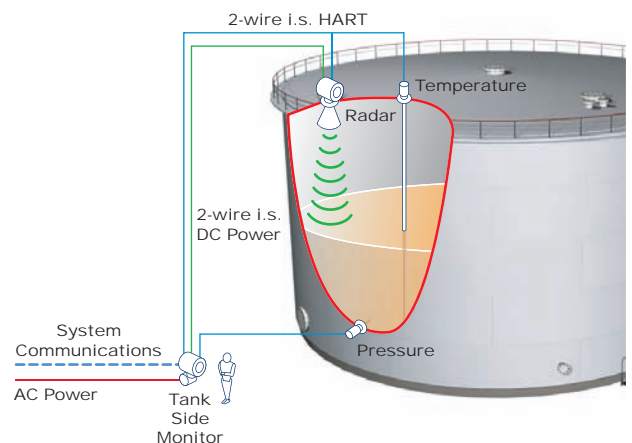

Function and System Design

The 9909 Average Temperature Sensor (ATS) assembly hangs vertically in the product from the roof of the tank. Each element within the model 9909 ATS measures resistance as it varies with the change in product temperature. The longest totally submerged element gives the best average temperature and is selected by the connected temperature transmitter (4120 Multi-Element Temperature Transmitter). As the temperature transmitter needs to know the product level in order to select the correct element, Varec recommends the 9909 ATS as one part of an overall inventory management system.

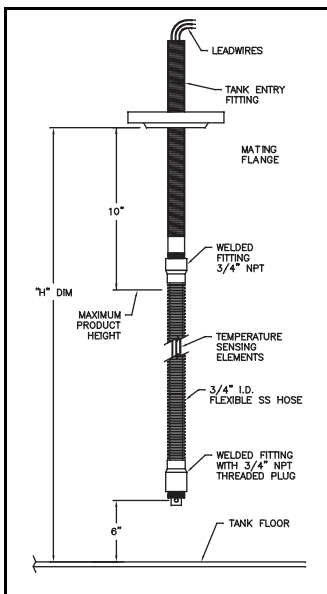

contacts that operated on a cam. As the level changed, the cam rotated and the contact wiped a circuit board. Each element was connected to the board and each element was selected by position. While this method was adequate, problems could occur due to corrosion and wear. The majority of devices today use electronics for increased accuracy for averaging bulb selection while increasing safety with integral intrinsically safe barriers. The model 9909 ATS provides the flexibility to be used with the older 'T' systems and newer devices.

Spot RTD Quantity	Standard Spacing of elements
1	0-3 Feet
2	0-5 Feet
3	0-7 Feet
4	0-10 Feet
5	0-14 Feet
6	0-20 Feet
7	0-26 Feet
8	0-32 Feet
9	0-40 Feet
10	0-50 Feet

Element Selection

Selection can be accomplished mechanically or electronically. Older transmitters and servo gauges utilized a device known as the 'T' Feature ('T' for temperature). This was a switch with gold plated

Installation Guidelines

The 9909 ATS may be installed on fixed roof, internal or external floating roof storage tanks and pressurized tanks, such as spheres and bullets, up to a maximum working pressure of 50 psi (344 kPa).

In-Service and Out-of-Service Installations


Varec recommends fixing/weighing the end of the averaging bulb to reduce its movement in the tank resulting in more accurate readings. For in-service installations, a weight may be attached to the bottom of the averaging bulb using a 9/32" (7 mm) diameter connector. For out-of-service installations, this connector may also be used to attach to a bracket that is welded to the bottom of the tank. The weight is 3" (76 mm) in diameter.

Standpipes and Thermowells

Floating roof tanks may utilize a perforated standpipe to house the 9909 ATS. If a thermowell is to be used with the 9909 ATS, Varec suggests the use of a 2" (51 mm) schedule 40 thermowell. A non-perforated thermowell is generally oil filled to improve thermal response to product temperature changes.

Mounting the 9909 ATS

Two 4" (100 mm) diameter MSS flanges with gaskets are installed, one on each side of the tank roof. The averaging bulb 3/4" (19 mm) threaded tube is then screwed into the MSS flange. This method requires access to the inside of the tank. An alternate method is to order the unit with an ANSI flange, which is available up to 4" (100 mm). The standard lead length of a flange is 4.9 ft (1.5 m); please consult the factory for any non-standard lead lengths. For use with floating roof tanks, an additional nylon bush may also be required.

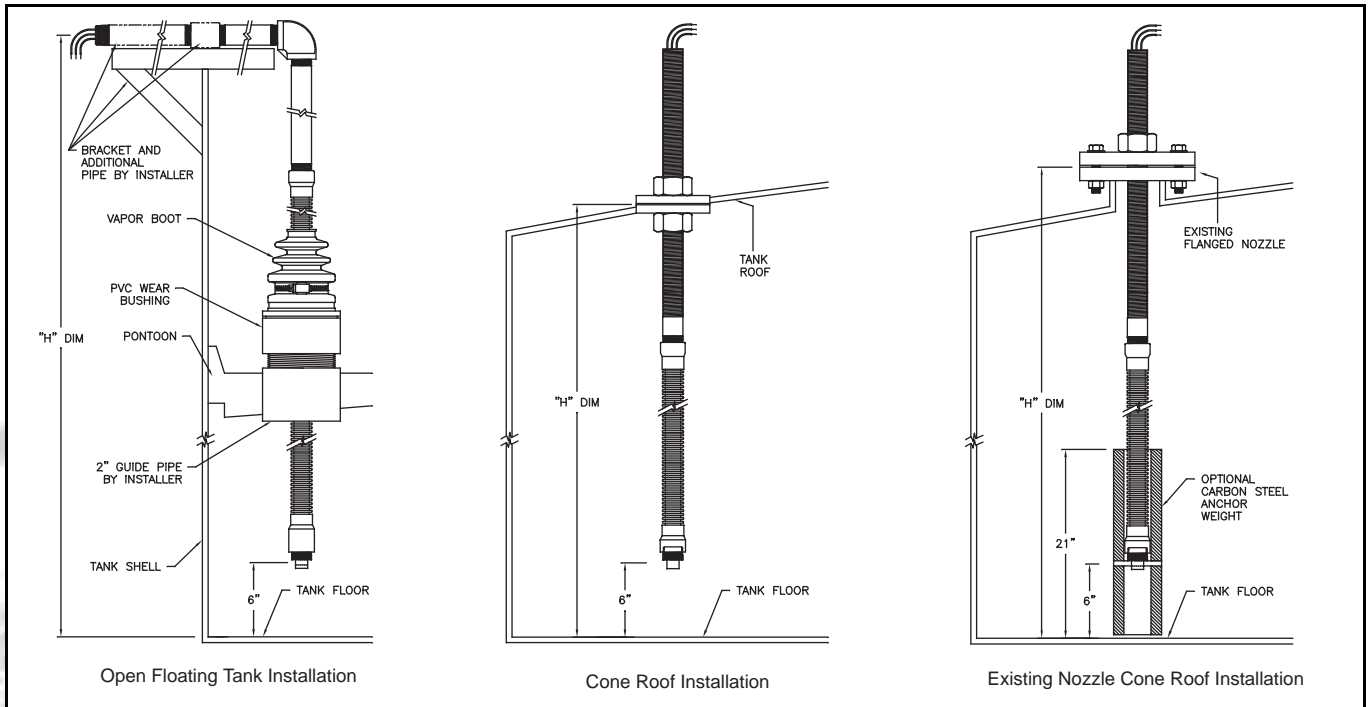

Example installations

Technical Specifications

The sensor consists of between six and ten graduated lengths of loop wound resistance elements housed in a flexible 316 S.S. or Monel sheath.

Functional

Number of elements	6 min. – 10 max.
Insulation test	1000 V _{dc}
RTD change/degree	0.2155 Ohms/°F (32 °F to 212 °F) 0.3879 Ohms/°C (0 °C to 100 °C)
Element resistance	100 Ohms at +77 °F (+25 °C).
Operating range	Type I: 0 °F to 212 °F (-17 °C to 100 °C) Type II: 0 °F to 392 °F (-17 °C to 200 °C)

Physical

Housing pressure test	125 psig (861 kPa)
Outer sheath material	Type 316 S.S. or Monel
Sheath dimensions	Internal 3/4" (19 mm) Ø – External 1" (25.4 mm) Ø
Top connection	3/4" NPS
Tank floor connection	9/32" (7mm) Ø

Environmental

Operating temperature	-40 °F and +185 °F (-40 °C and +85 °C)
Operating humidity	0 to 95% relative humidity non-condensing

Performance

Accuracy	Type I: ±0.25 °F (±0.14 °C) Type II: ±0.5 °F (±0.28 °C)
-----------------	--

Order Codes

9909 Average Temperature Sensor

Housing Material	
1	Housing material 316 SS
2	Housing material Monel
Service	
1	Standard: -17 to +100°C (0 to 212°F)
2	High Temperature: -17 to +200°C (0 to 392°F)
Element Type	
1	100 Ohm wire wound copper
2	DIN platinum characterized copper
Process Connection	
0	2" 150 lb RF Flange C.S.
1	Type 1 3/4" NPS Hex Nut/Washers
9	Other, please sepcify
Anchor Weight	
0	none
1	Standard, Steel (3" min. flange)
2	Reduced size, Steel (2" min. flange)
3	Standard, Stainless Steel (3" min. flange)
4	Reduced size, Stainless Steel (2" min. flange)
Leadwire Length, Connection Head	
1	5 ft Leadwire
3	NEMA VII connection to head & terminal strips
5	Other, please sepcify
Tank Height in Feet (0 to 50 ft / 0 to 17 m)	
SF	Height in feet, SS
MF	Height in feet, Monel
Tank Height in Inches (0 to 12 in/ 0 to 205 mm)	
SI	Height in inches, SS
MI	Height in inches, Monel
N9909M-	Complete product designation



www.varec.com

Corporate Headquarters
 5834 Peachtree Corners East
 Norcross (Atlanta), GA 30092
 USA
 Tel: +1 (770) 447-9202
 Toll Free: +1 (866) 698-2732
 Fax: +1 (770) 662-8939

Houston
 5151 San Felipe
 Sage Plaza, Suite 1100
 Houston, Texas 77056
 USA
 Tel: (281) 498-9202
 Fax: (281) 498-0183

Asia Pacific
 Level 8, 91 William St.
 Melbourne
 Victoria 3000
 Australia
 Tel: +61 3 8623 6400
 Fax: +61 3 8623 6401

Europe
 Suite 120, 94 London
 Road
 Headington, Oxford
 Oxfordshire, OX3 9FN
 United Kingdom
 Tel: 0800 044 5704
 Fax: 0844 544 1874

Authorised Representative

If no official representative is listed here, please visit www.varec.com to find your local representative.
 2010 © Varec, Inc. All Rights Reserved. This document is for information purposes only. Varec, Inc. makes no warranties, express or implied, in this summary.
 The names of actual companies and products mentioned herein may be the trademarks of their respective owners.