




The 6600 Liquid Level Indicator (LLI) is a tank side device. A float inside the tank is connected to an indicator in a clear tube mounted outside of the tank. The indicator moves up and down based on the level of product in the tank.

With the bright orange indicator, the liquid level is easy to read safely from the ground, providing faster and better visibility to what had typically been unseen.

6600 Liquid Level Indicator

Safe and easy-to-use level indication with ground level visibility

Overview

The gauge in the 6600 LLI tube provides an easy-to-use measurement scale to illustrate product levels up to eight feet. With this information available in real time from the safety of the ground, sites can eliminate time consuming manual measurement tasks, while also reducing the potential hazards to workers in the field.

For active drilling sites, eliminating the guesswork on crude levels, water and other liquids helps provide greater efficiency in day-to-day operations. The 6600 LLI is ideal for use on frac tanks, mobile or portable tanks functioning as integrated treatment systems, storage tanks in production fields, and for small tanks in remote locations where power isn't readily or consistently available.

Key Features:



- Accurate level indication
- Easy-to-read measurement from a distance
- Not open to atmosphere
- Weather resistant
- No power required
- Designed for mobile tanks






6600 Liquid Level Indication

Safe and easy-to-use level indication with ground level visibility

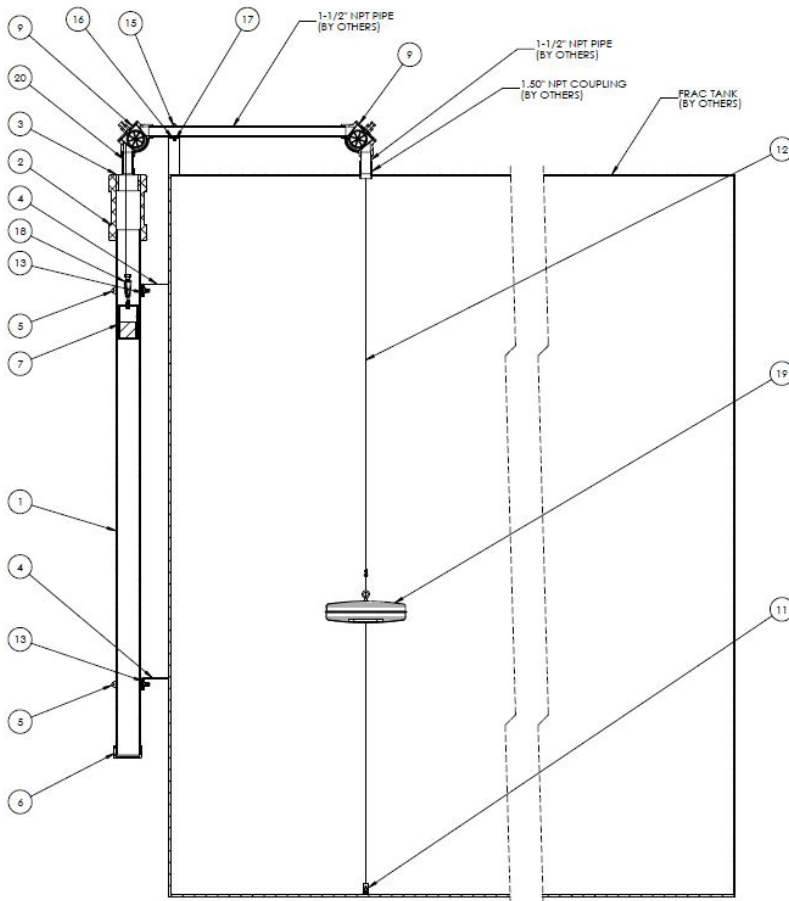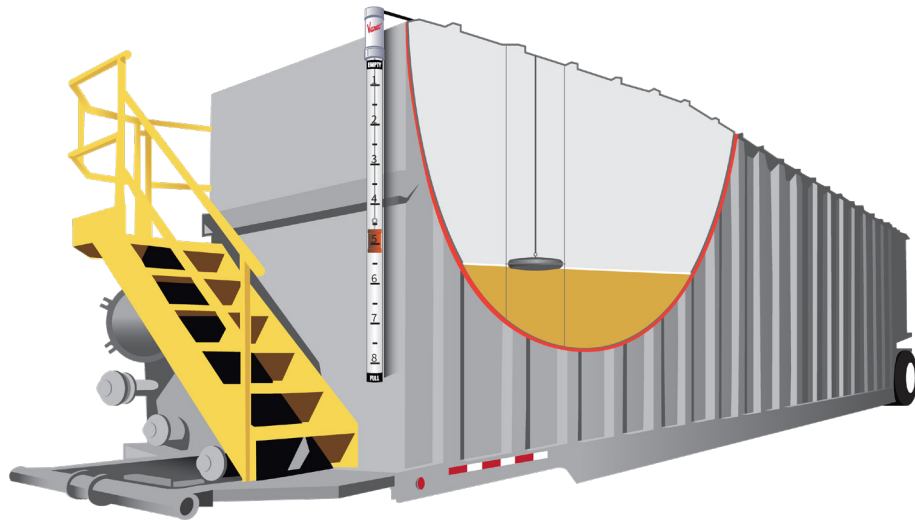

ITEM NO.	VAREC P/N	QTY.	DESCRIPTION	MATERIAL
1	05-013527	1	GAUGE TUBE ASSY	VINYL LABEL, POLYCARBONATE TUBE
2	P017-01-010	1	COMPRESSION COUPLING, 4" PIPE SIZE	PVC
3	P30-06-895	1	REDUCER, 4" PIPE SIZE X 1-1/2"	PVC
4	02-013530	2	TRAILER SIDE BRACKET	A36 CARBON STEEL
5	P38-8	2	TUBE CLAMP U-BOLT	ZN PL STEEL
6	P30-07-896	1	PIPE CAP	PVC
7	05-013535	1	INDICATOR ASSY	PVC
8	16-013531	1	VAREC LOGO STICKER	VINYL
9	06-08564	2	LOW PRESSURE 90° ELBOW	ALUMINUM HSG, DELRIN SHEAVE
10	BM5200	2	TOP ANCHOR ASSEMBLY (STEEL)	MILD CARBON STEEL
11	AA1025	1	BOTTOM ANCHOR ASSY	MILD CARBON STEEL
12	B10975-306	1	CABLE, 7 X 7, 3/32" DIA X 42'	316 SS
13	P31-919	4	STD. WASHER .562"ID X 1.375"OD	ZN PL STEEL
14	B5643-003	1	TANK SIDE BRACKET	MILD CARBON STEEL
15	A544-003	1	U-BOLT FOR 1.5" PIPE, 3/8-16 UNC	ZN PLATED STEEL
16	P31-446	2	FLAT WASHER 3/8" PREFERRED TYPE A NARROW (SAE)	ZN PL STEEL
17	P31-726	2	HEX NUT 3/8-16 UNC	ZN PL STEEL
18	BM5478-600	2	SNAP CONNECTOR ASSY	316 SS
19	BM9074-000	1	14.5" FLOAT ASSY	316 SS
20	02-013549	1	PIPE, 1-1/2"OD X 6' TOE	PVC
21	02-013539-02	1	PULL VINYL STRIP	VINYL

5834 Peachtree Corners East, Peachtree Corners (Atlanta), GA 30092 USA

Tel: +1(770) 447-9202 | Toll Free: +1(866) 698-2732 | Fax: +1(770) 662-8939 | sales@varec.com | www.varec.com

© 2021 Varec, Inc., a Leidos company. All rights reserved. This document is for information purposes only. Varec, Inc. makes no warranties, express or implied, in this summary. The names of actual companies and products mentioned herein may be the trademarks of their respective owners.

Document Code : PR0177-20210324

Varec®